

GR Lifting grab

Round materials and tubes are simple and safe grabbed by the scissor grab GR.

With a protective coating, even material with sensitive surfaces can be gently gripped.

The covering also prevents slipping if the attachment point is not at the centre of gravity.


Type	Load kg	A mm	B mm	Z mm	Weight kg
GR 0,1/150	100	270	292-458	50-151	3.9
GR 0,5/200	500	503	417-723	35-200	13.6
GR 1,0/200	1,000	509	437-745	35-200	13.6
GR 1,5/300	1,500	720	520-937	80-300	27
GR 3,0/300	3,000	740	582-960	80-300	49
GR 4,0/600	4,000	1,420	930-1,815	200-600	204

Notes & Standards

DIN EN 13155, directive 2006/42/EG, DIN EN ISO 12100, DGUV rule 109-017, eyelets for crane hooks according to DIN 15401, Inspection before initial commissioning is made by a competent inspector of the client.

Application range: Load change up to 16,000, Temperature -20° to +80° C

Warranty 12 months after delivery (wearing parts excluded). Delivery with documentation (type plate with CE marking and test book - EC declaration of conformity, test certificates, operating instructions and release drawing).

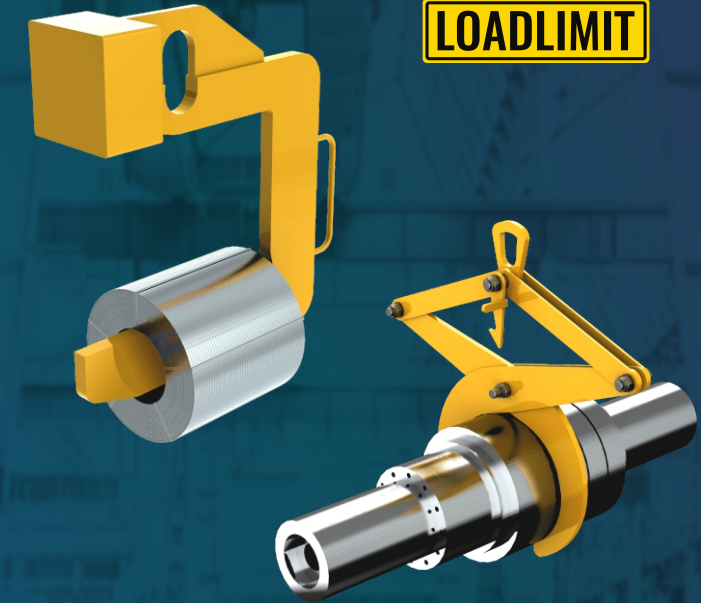

Customized products

Deviating from our standard models we also produce according to your special requirements.




Standard versions

- For round material up to 600 mm diameter
- Load cushion made of rubber or plastic
- Automatic locking
- Parking trestle available

CH GR

C-Hooks and lifting grabs

 Quality
Made in Germany

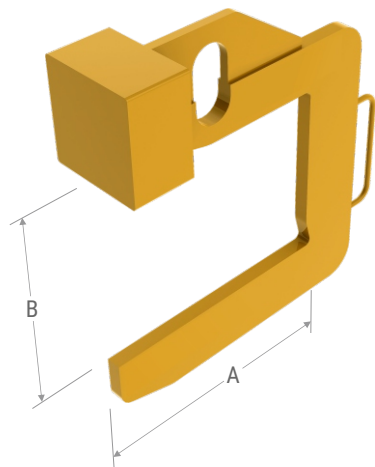

CH C-Hook

Coils, rolls, rings, bushes and similar loads are transported efficiently and safely with C-hooks.

Fork length, effective height and counterweights are customised to your requirements.

Our standard products are available from 500 to 10,000 kg load capacity.

Type	Load kg	A mm	B mm	Weight kg
CH 0,5/300	500	300	400	21
CH 0,5/500	500	500	400	30
CH 0,5/800	500	800	400	46
CH 1,0/300	1000	300	450	28
CH 1,0/500	1000	500	450	40
CH 1,0/800	1000	800	450	95
CH 2,0/300	2000	300	500	45
CH 2,0/500	2000	500	500	90
CH 2,0/800	2000	800	500	140
CH 2,0/1000	2000	1000	500	180
CH 3,0/300	3000	300	500	68
CH 3,0/500	3000	500	500	127
CH 3,0/800	3000	800	500	165
CH 3,0/1000	3000	1000	500	215
CH 5,0/500	5000	500	550	184
CH 5,0/800	5000	800	550	238
CH 5,0/1000	5000	1000	550	286
CH 5,0/1250	5000	1250	550	364
CH 10,0/1000	10000	1000	650	772
CH 10,0/1250	10000	1250	650	810
CH 10,0/1500	10000	1500	650	980


Customized products

Deviating from our standard models we also produce according to your special requirements.



Standard versions

- For different roll dimensions
- Load capacity up to 10,000 kg
- Counterweight matched to load

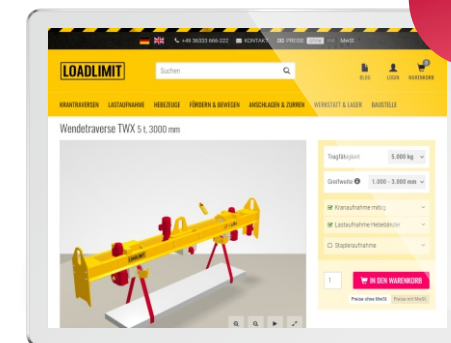

LOADLIMIT.COM

Configure lifting beams online



ONLINE-SHOP
LOADLIMIT.COM



TELEPHONE
+49 36333 666-222

LOADLIMIT®
Nordhäuser Straße 2
99765 Heringen
Germany